


Electric sash lift

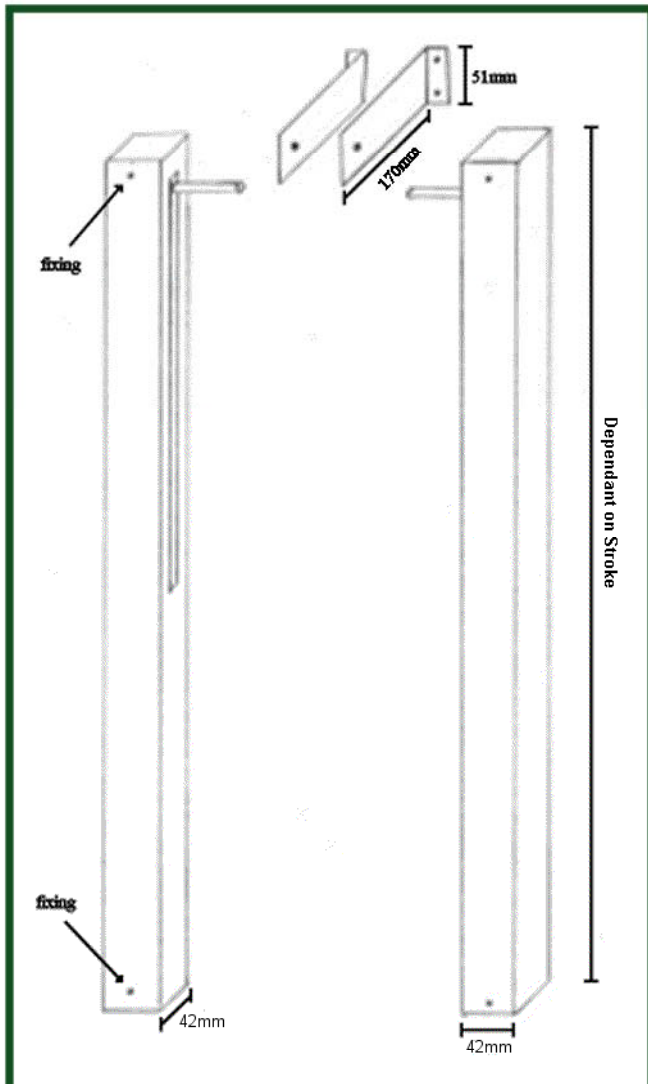

The electric sash lift has been designed and tested over several years by L.J. Pratley & Partners. It is suitable for opening sliding sash window's either top, bottom or both vents.

Ideal for use wherever there is a sliding sash window that cannot be easily reached i.e. behind a sink, over a desk, above your stairs or for use by the disabled and elderly where opening and closing a heavy window can be difficult.

Providing the window is in good working order this system can be fitted to aluminium, U-pvc or timber framed windows and can be sprayed to any specific RAL colour, at extra cost. Standard colour: White.

Technical data

Input/operating voltage:	24 V DC (-15 % / +25 %)
Current draw (nominal):	approx. 2 amp per pair
Pressing force:	1200N
Tractive force:	1200N
Nominal clamping force:	2000 N
Stroke length:	200, 300, 500mm (customised lengths available on request) further lengths available
Power supply cable:	2 x 0.5 mm ² ; 4 x 0.5 mm ² for synchronous operation; length approx. 1 m; silicon white
Cut-off:	integrated electronic power cut-off (LA) depending on version
Speed:	approx. 6.7 mm/sec
Start-up time:	3 min. (ED/ON), 7 min. (AD/OFF)
Protection degree:	IP 54 according to DIN 40 050
Ambient operating temperature:	-5 °C to +75 °C